



Raynor TC200, 8' x 12' in sepia with full view aluminum ranch windows

T H E R M A L
S A N D W I C H
C O N S T R U C T I O N

Max.	Max.				Exterior/					
Opening	Opening		Surface	Section	Interior	End Stile	Insulation	Thermal	Exterior	Section
Width	Height	Construction	Texture	Thickness	Steel Thickness	Steel	(R-Value)	Break	Colors	Warranty
18'	14'	Steel Sandwich	Stucco	2"	26 ga. (.015")	18 ga.	Polystyrene	Yes	White, Almond	I-Year
					26 ga. (.015")		(10.25)		ClayTone, BronzeTone	(Any Rust)
									Brown*, Sepia*,	10-Year
									Frost White*,	(Delamination)
									Beige* & Custom	
									Powdercoat Colors	
*Eastures the Kunarill naint precess which provides extended LIV protection against fading										





RAYNOR TC200 FEATURES

2" thick door sections are made from high-strength, impact-resistant




Weatherseal.

Bottom weatherseal keeps out the elements.



Section Joints.

Vinyl thermal break between interior and exterior skins, along with a section joint seal prevent weather infiltration.

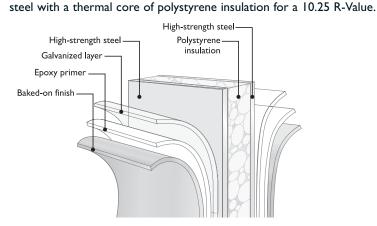

Two-sided sandwich construction provides TC200 doors with

an attractive and durable white finished steel interior.

Construction.

Finished Interior.

Hardware.

TC200 has heavy-duty, hot-dipped galvanized steel sections with an epoxy primer and baked-on polyester finish to resist rust and impact. The rugged, hotdipped galvanized steel track and steel wheel, ball-bearing rollers assure durable, long lasting performance.




Windows.

TC200 windows use 1/8" DSB, insulated glass and are available in five different options: 24" x 8" oval windows (top), full view aluminum ranch (bottom), full view aluminum colonial, standard ranch, and standard colonial.



Specifications & Drawings.

Visit us at www.raynor.com for CSI Master Format[™] Specifications, Raynor Quick Specs and Standard Drawings





CLICK

1-800-4-RAYNOR

1-815-288-7142



This information was as complete and factual as possible at the time it was printed. We do, however, reserve the right to make changes in product specifications and availability without notice. Features and options may be different in countries other than the United States. Product colors have been reproduced as well as possible with present commercial printing processes. For absolute accuracy in color matching, use actual product samples.